


ergoArc™

V-M1B Ergonomic Mouse

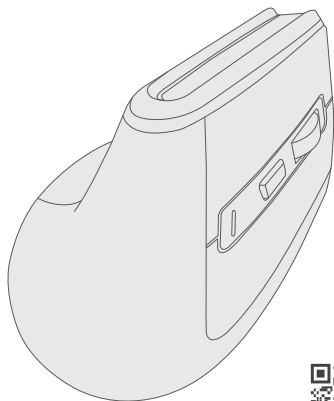

— User Manual —

Packing List




V-M1B Mouse x 1



V-M1B USB Receiver x 1




Charging Cable x 1



User Manual x 1

Diagram

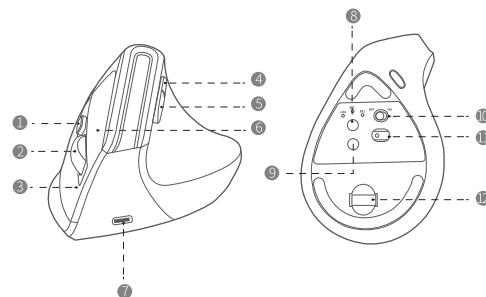


1. DPI Button
2. Scroll Wheel
3. Right Button
4. Backward Button
5. Forward Button
6. Left Button

7. Charging Port
8. Mode Switch Button
9. Light Switch Button
10. ON/OFF Switch
11. Power Indicator Light
12. USB Receiver

V-M1B Mouse Features

1. Multiple Modes Switch: There are 3 modes as BT1, BT2 and 2.4G, which can separately connect to 3 devices. You can switch the mode via the bottom mode switch button.



2. The V-M1B is equipped with 5 DPI (800/1200/1600/2400/3200), you can switch them cyclically by pressing DPI button.
3. Power Saving Mode: The V-M1B will automatically enter into sleep mode if it's unused for 10min, it can be woken up by pressing Left/ Right button or moving.
4. RGB Lighting: Short press the light button on the bottom of V-M1B mouse to switch among 4 lighting mode in cycle.
5. Built-in 500mAh lithium battery. It works half a month with light on and 2 months with the light off.
6. Rechargeable: Charge the V-M1B with the included charging cable. The indicator light will flash quickly when in low battery stay steady when charging and turn off when full charged.

Note: Forward and Backward buttons are not available on MacOS.

Instructions

First Use

1. Take out the V-M1B mouse and turn on the bottom switch.
2. The V-M1B default mode is BT1 with its indicator light flashing slowly. Long press the mode switch button for 3sec, and the mouse will enter into bluetooth pairing state after the indicator light turns to flash quickly.
3. Turn on the bluetooth on your laptop or mobile device, for Windows 7 or earlier systems, please select 'V-M1B 3.0'. for Windows 8 or later systems, please select 'V-M1B 5.0'. you can start use after successfully connection.

Mode Switch

1. BT Mode: Short press the bottom mode switch button to switch the V-M1B mouse to BT2 mode. BT2 indicator light will flash slowly. Then refer to the BT1 connection steps for connection.
2. 2.4G Mode: Short press the bottom mode switch button to switch the mouse to 2.4G mode, and the indicator light will flash slowly. Plug the USB receiver in computer port, and the V-M1B is workable after it's paired with computer automatically.

Solution for 2.4 Connecting Problems

Repeat the pairing steps after confirming that mouse is under in 2.4G mode. Press left button, right button and scroll wheel simultaneously for 3-5 seconds, and release them after the indicator light flashes quickly. Then plug USB receiver in computer port for pairing.

Solutions BT1/ BT2 Connecting Problem

Reboot the V-M1B mouse and empty the clear list on your computer. Repeat the connecting steps according to the instruction of BT1/ BT2 connection.

Note: If the product is still unworkable after above solutions, you could repeat those steps for few time. If your problem can't get resolved yet, please contact our customer support for help.

Email: support@ergoarc.com